
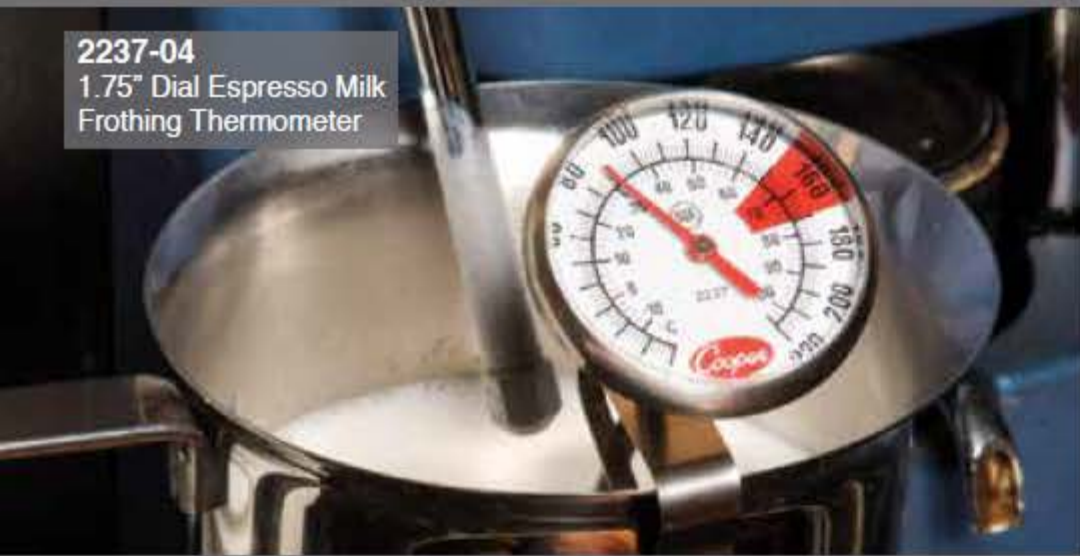



Bi-metal Insertion Thermometers

The Cooper-Atkins' bi-metal pocket test thermometers have an external dimple on the stem to indicate the minimum insertion point. The 1246 Series is not recommended for thin, delicate foods such as hamburger patties, seafood and pork chops. The bi-metal pocket tests have a magnifying lens for improved reading and a pocket sheath with adjustment wrench, made with antimicrobial plastic. Our 1246-02 dials have a blue indicator mark at 32° (freezing point) for ease of adjustment and a HACCP danger zone highlighted in red.

	1246-01 1246-01C	1246-02 1246-02C	1246-03 1246-03C
Temperature Range:	-40° to 180°F (-40° to 80°C)	0° to 220°F (-20° to 100°C)	50° to 550°F (10° to 285°C)
Accuracy:	±2°F (±1°C)	±2°F (±1°C)	±5°F (±3°C)
Housing Material:	Stainless Steel	Stainless Steel	Stainless Steel
Dial Diameter:	1" (25 mm)	1" (25 mm)	1" (25 mm)
Stem Diameter:	0.140" (3.5 mm)	0.140" (3.5 mm)	0.140" (3.5 mm)
Stem Length:	5" (127 mm)	5" (127 mm)	5" (127 mm)
Lens Material:	Magnifying Polycarbonate	Magnifying Polycarbonate	Magnifying Polycarbonate
Antimicrobial Plastic:	Yes Sheath Only	Yes Sheath Only	Yes Sheath Only
Weight:	0.5 oz (14 g)	0.5 oz (14 g)	0.5 oz (14 g)
Regulatory Listings:	NSF	NSF	NSF
Warranty:	1 Year	1 Year	1 Year

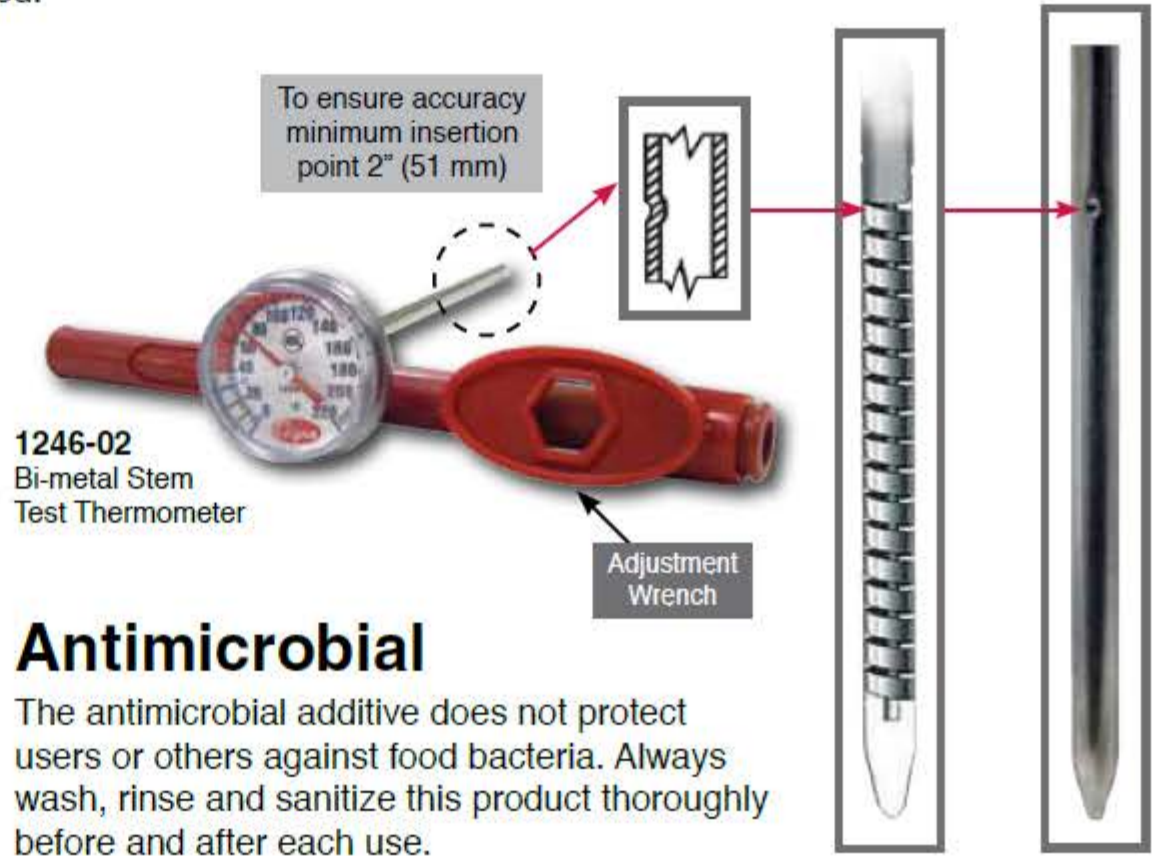

	322-01	1236-70	2237-04/04C
Temperature Range:	200° to 400°F (90° to 200°C)	0° to 220°F	0° to 220°F (-10° to 104°C)
Accuracy:	±5°F	±2°F	±2°F (±1°C)
Housing Material:	Stainless Steel	Stainless Steel	Stainless Steel
Dial Diameter:	2.5" (64 mm)	1" (25 mm)	1.75" (178 mm)
Stem Diameter:	0.190" (4.8 mm)	0.140" (3.6 mm)	0.15" (3.8 mm)
Stem Length:	6" (152.4 mm) w/ vessel clip	5" (127 mm)	7" (178 mm) w/ vessel clip
Lens Material:	Glass	Magnifying Polycarbonate	Magnifying Polycarbonate
Weight:	2 oz (57 g)	0.5 oz (14 g)	1 oz (28 g)
Regulatory Listings:	NSF	NSF	NSF
Warranty:	1 Year	1 Year	1 Year

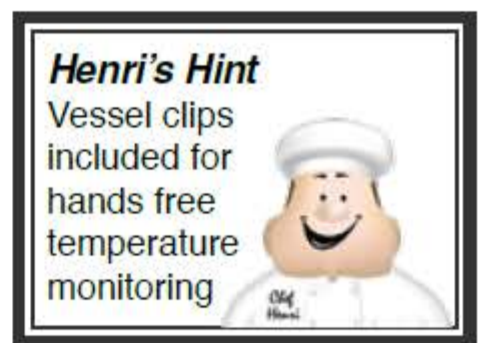

Bi-metal Insertion/Cooking Thermometers

Protecting food during the preparation process is extremely important. When working with potentially hazardous foods you need to make sure it spends less than 4 hours in the “Danger Zone” between 41°F and 135°F (5°C - 57°C). Food exposed to this temperature for too long is not safe to consume. The final cooking temperature should always be tested with a thermometer, never just by looking at or touching the food.

	323	2238-06	2238-14	3270-05
Temperature Range:	120° to 200°F (49° to 93°C)	0° to 220°F (-10° to 100°C)	50° to 550°F (20° to 280°C)	50° to 550°F (10° to 285°C)
Accuracy:	±2°F (±1°C)	±2°F (±1°C)	±5°F (±2.5°C)	±10°F (±5°C)
Housing Material:	Stainless Steel	Stainless Steel	Stainless Steel	Stainless Steel
Dial Diameter:	2.5" (64 mm)	2" (51 mm)	2" (51 mm)	2.5" (64 mm)
Stem Diameter:	0.190" (4.8 mm)	0.140" (3.5 mm)	0.140" (3.5 mm)	0.250" (6.4 mm)
Stem Length:	6" (152 mm)	8" (203 mm)	8" (203 mm)	15" (381 mm)
Lens Material:	Glass	Glass	Glass	Glass
Weight:	2 oz (57 g)	1.5 oz (43 g)	1.5 oz (43 g)	5.5 oz (156 g)
Regulatory Listings:	NSF	NSF	NSF	-
Warranty:	1 Year	1 Year	1 Year	1 Year


323
Roasting Thermometer



2238-14
8" Stem Test Thermometer



3270-05
Deep-Fry Thermometer

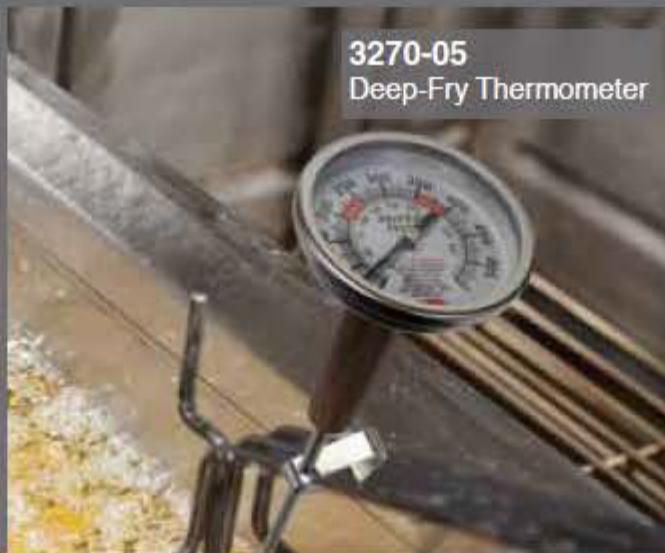

3210-08
Grill Thermometer



	24HP-01	26HP-01	3210-08
Temperature Range:	100° to 600°F (50° to 300°C)	100° to 175°F (38° to 80°C)	100° to 600°F (50° to 300°C)
Accuracy:	±25°F (12.5°C)	±3°F (±1.5°C)	±25°F (12.5°C)
Housing Material:	Stainless Steel	Stainless Steel	Aluminum
Dial Diameter:	2" (51 mm)	2" (51 mm)	2.5" (64 mm)
Lens Material:	Glass	Glass	Glass
Weight:	1.5 oz (43 g)	1.5 oz (43 g)	3 oz (85 g)
Regulatory Listings:	NSF	NSF	NSF
Warranty:	1 Year	1 Year	1 Year



24HP
HACCP Dial
Oven Thermometer

The 24HP was voted the Most Reliable Oven Thermometer by America's Test Kitchen.